G+ BY GRAM PROFESSIONAL

MADE IN DENMARK



PROCESS SC500 & SC710

The SC models are multifunctional and designed for modern commercial kitchens – where flexibility and functionality are essential.

The only thing that distinguishes the two models from one another is their size. They have the same functions and a temperature range from -30 °C to +10 °C, and can be used for chilling, freezing or soft rapid cooling, depending on the kitchen's needs.

The cabinet operates with three different cooling programmes: time-controlled, hard or soft cooling to a set temperature to give the kitchen full control over processes, food safety and quality.
Once the process cycle is complete, the cabinet automatically returns to storing the products at the pre-selected and set temperature. When the cabinet is used as a standard fridge and freezer, simply set it to the preferred temperature.


Overall, a highly versatile choice for the modern kitchen, where flexibility is needed without compromising on quality.

Standard equipment:
- Stainless steel interior and exterior
- 5 stainless steel wire shelves with anti-tilt
- Practical and reversible pedal door opener for easy access
- Right hinged reversible door with self-closing function and lock
- LED lighting
- Removable heavy-duty door gasket
- Ajustable legs (135-200 mm) or castors (128mm)


Optional extras:
- Additional wire shelves and support rails
- Perforated shelves in stainless steel
- Left-hinged door
- Various castor and leg options
- Available for remote installation on request

	SC500 -30/+10°C	SC710 -30/+10°C
MODEL	SC500 G S RA L2 5S A	SC710 G S RA L2 5S A
ITEM NUMBER	945180120	947180120
VOLUME (liter, gross/net)	465 / 319	614 / 451
NUMBER OF SHELVES	5	5
SOUND LEVEL (db(A))	49,8	46,2
COOLING CAPACITY AT -10°C (W)	1706	2326
CLIMATE CLASS	5 (40°C/40% RH)	5 (40°C/40% RH)
DIMENSIONS W x D x H (m)	600x855x2125	820x785x2125
GROSS WEIGHT (kg)	132	167
REFRIGERANT / FILLING	R290 / 0,150 kg	R290 / 2 x 0,149 kg
GWP / Co2 EQUIVALENT	3 / 0,00045 t	3 / 0,000894 t
CONNECTION	230 v, 50 Hz / 5,66A	230 V, 50Hz / 8,24A
CONNECTION LOAD (w)	1025	1523
MAX LOADING CAPACITY (kg) from +60°C to +8°C in 4 hours	25	50

SC500

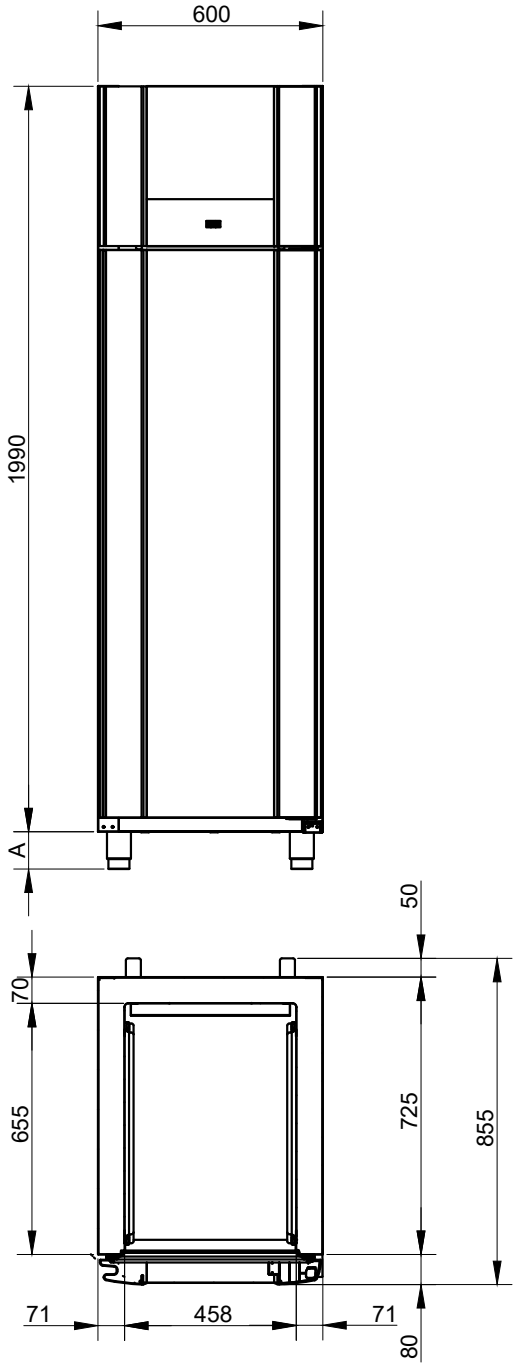

SC710

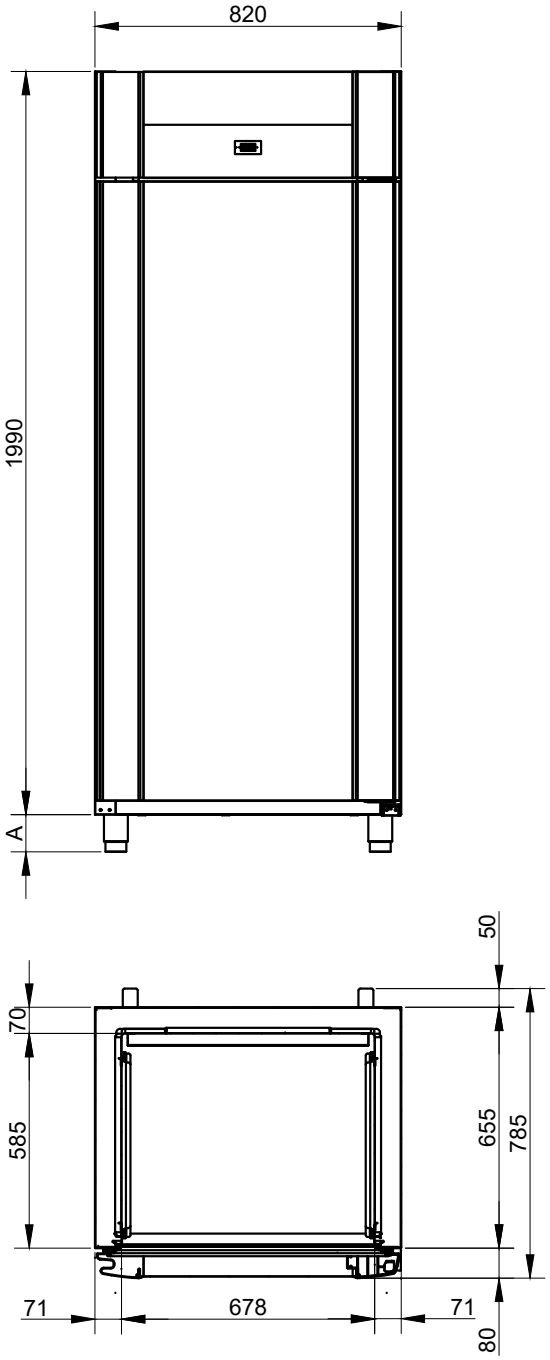

A	C1	C2	C3	L1	L2
	110	128	128 360° w/brake	100-130	135-200