G+ BY GRAM PROFESSIONAL

MADE IN DENMARK

COMPACT 400



Compact 400 is reliable and space-efficient, designed for kitchens and serving areas with limited space.

Its low noise level and compact size ensure versatile use, as it can be placed directly in serving areas, bars and cafés, either built-in or freestanding.

The optimised cooling system guarantees energy-efficient and stable operation, automatic defrosting and rapid temperature recovery – even with frequent door openings.

The intelligent control system with a user-friendly control panel optimises operational reliability and ensures low energy consumption.

With a full-length handle built into the door, you are assured of good ergonomics and efficient operation, and the rounded corners and removable magnetic door gaskets make it easy to maintain optimal hygiene.

The exterior material can be adapted to suit the use and purpose – choose between stainless steel and white-lacquered steel.

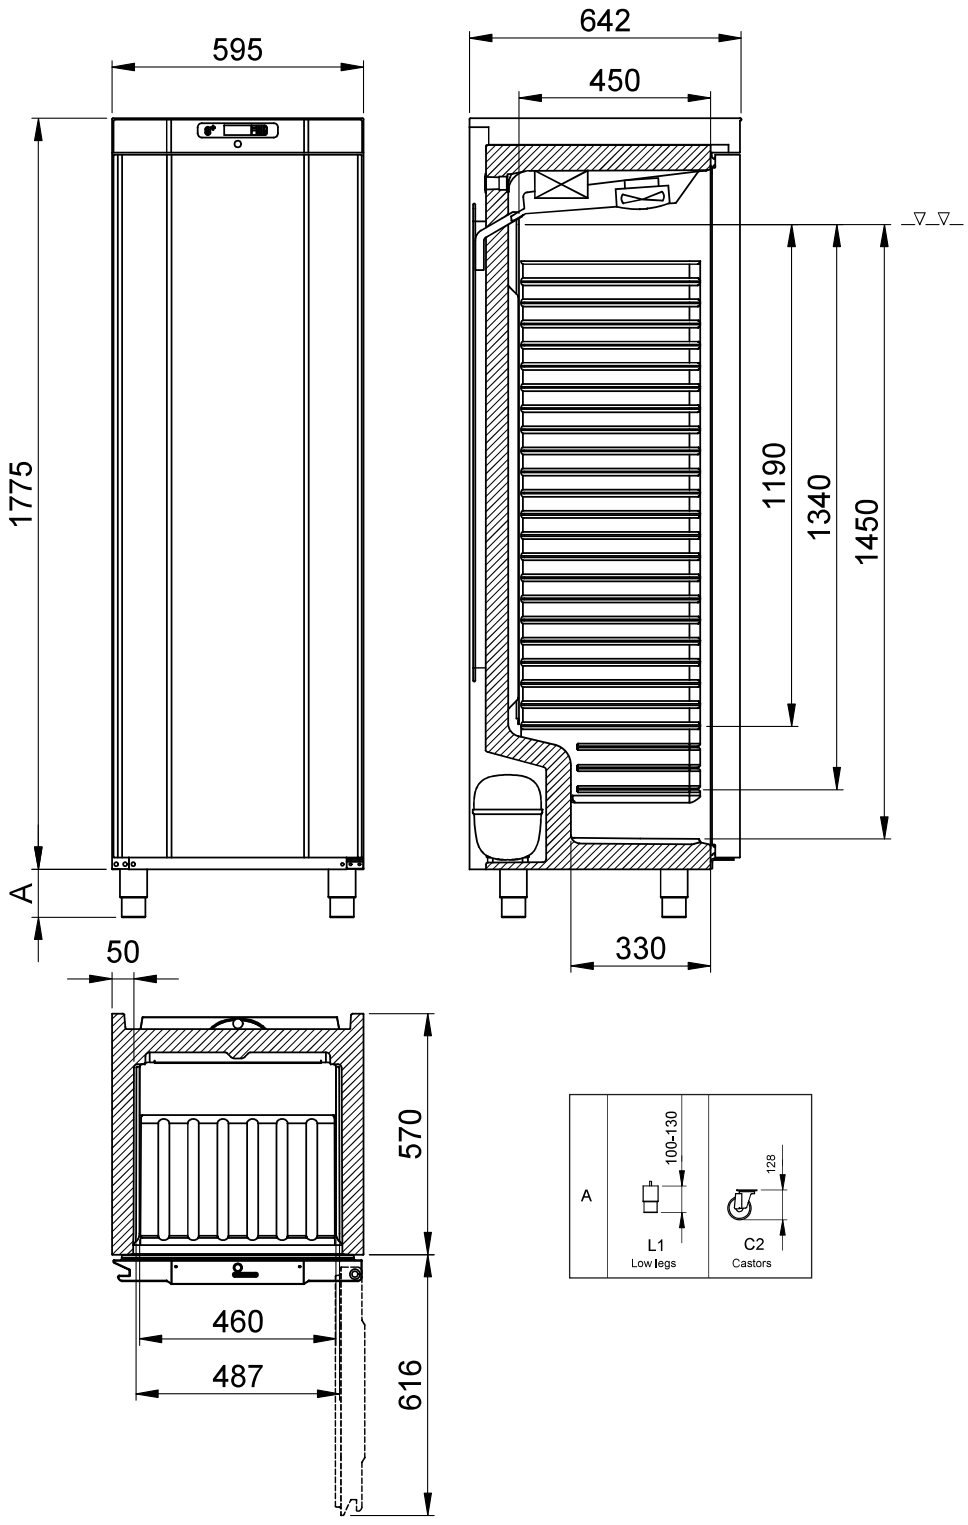
Delivered in the well-known high quality from Gram Professional, ensuring stable operation and long service life.

Standard equipment:
- Exterior in stainless or white painted steel
- Interior made in one piece vacuum-formed PS with moulded shelf supports
- 5 nylon coated wire shelves (anti-tilt)
- Right hinged reversible door with lock
- Removable heavy-duty door gasket
- Adjustable legs (135-200 mm) or castors (128 mm)

Optional extras:
- Additional wire shelves (coated or stainless)
- Perforated shelves in stainless steel
- Left hinged-door
- Various castor and leg options

	REFRIGERATOR +2/+12°C	FREEZER -25/-5°C
MODEL	R400	F400
ITEM NUMBER STAINLESS STEEL	944000121	944020221
ITEM NUMBER WHITE	944000120	944020220
VOLUME (liter, gross/net)	359 / 266	359 / 266
NUMBER OF SHELVES	5	5
ENERGY EFFICIENCY CLASS / EEI	B / 31,0	C / 39,5
ENERGY CONSUMPTION (kwh/year)	325	1101
SOUND LEVEL (db(A))	34,5	36,6
COOLING CAPACITY AT -10°C (W)	210	–
COOLING CAPACITY AT -25°C (W)	–	200
CLIMATE CLASS	4 (30°C/55% RH)	4 (30°C/55% RH)
DIMENSIONS W x D x H (m)	595x642x1875	595x642x1875
GROSS WEIGHT (kg)	73	76
REFRIGERANT / FILLING	R600a / 0,051 kg	R600a / 0,047 kg
GWP / Co2 EQUIVALENT	3 / 0,000153 t	3 / 0,000141 t
CONNECTION	230 V, 50 Hz / 0,41 A	230 V, 50 Hz / 1,11A
CONNECTION LOAD (w)	88	151

COMPACT 400


595
642
450
1775
1190
1340
1450
A
50
330
570
460
487
616
A
100-130
L1
Low legs
128
C2
Castors