

COMPACT 600



The Compact 600 is practical and reliable, designed for kitchens and serving areas with limited space.

The model is compact, but with a space-optimised design in GN dimensions (2/1 GN depth) and a height of just under 2 metres, it is both spacious and fits where most other devices of this kind cannot.

The intelligent controller with a user-friendly control panel optimises operational reliability and ensures low energy consumption.

A full-length handle integrated into the door ensures good ergonomics and efficient operation, whilst the rounded corners and removable magnetic door gaskets make it easy to maintain optimal hygiene.

Its low noise level and small size ensure versatile use, as it can be placed directly in serving areas, bars and cafés, either built-in or freestanding and the exterior material can be adapted to suit the use and purpose – choose between stainless steel and white-lacquered steel.

Delivered in the well-known high quality from Gram Professional, ensuring stable operation and long service life.

Standard equipment:




- Exterior in stainless or white painted steel
- Interior made in one piece vacuum-formed PS with moulded shelf supports
- 4 nylon coated wire shelves (anti-tilt)
- Right hinged reversible door with lock
- Removable heavy-duty door gasket
- Adjustable legs (135-200 mm) or castors (128 mm)

Optional extras:

- Additional wire shelves (coated or stainless)
- Perforated shelves in stainless steel
- Left hinged-door
- Various castor and leg options

	REFRIGERATOR +2/+12°C	FREEZER -25/-5°C
MODEL	R600	F600
ITEM NUMBER STAINLESS STEEL	946000121	946020221
ITEM NUMBER WHITE	946000120	946020220
VOLUME (liter, gross/net)	580 / 421	580 / 421
NUMBER OF SHELVES	4	4
ENERGY EFFICIENCY CLASS / EEI	C / 40,2	C / 44,5
ENERGY CONSUMPTION (kwh/year)	523	1578
SOUND LEVEL (db(A))	45,4	46,4
COOLING CAPACITY AT -10°C (W)	413	–
COOLING CAPACITY AT -25°C (W)	–	502
CLIMATE CLASS	5 (40°C/40% RH)	5 (40°C/40% RH)
DIMENSIONS W x D x H (m)	695x868x2010	695x868x2010
GROSS WEIGHT (kg)	102	103
REFRIGERANT / FILLING	R600a / 0,058 kg	R600a / 0,043 kg
GWP / Co2 EQUIVALENT	3 / 0,000174 t	3 / 0,000129 t
CONNECTION	230 V, 50 Hz / 1,76A	230 V, 50 Hz / 2,51A
CONNECTION LOAD (w)	261	398

COMPACT 600

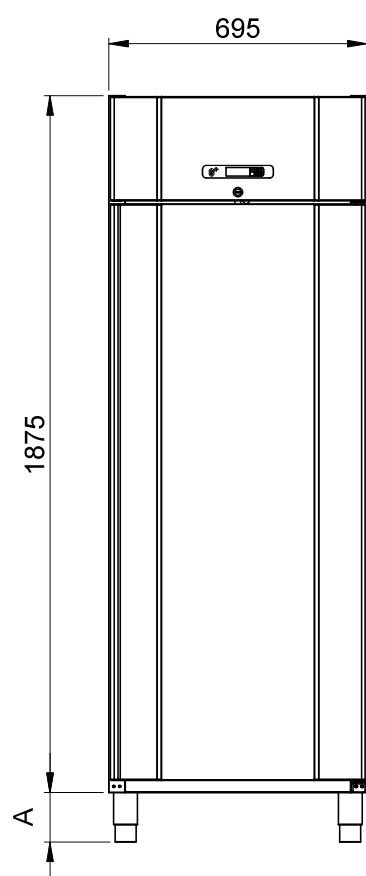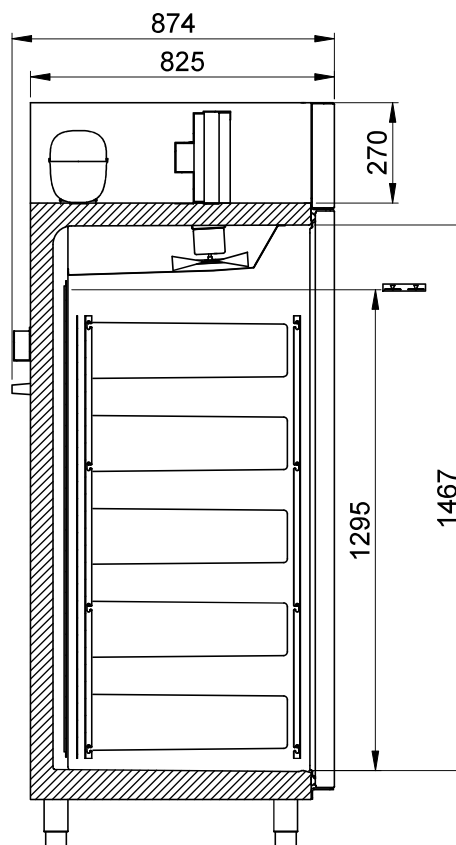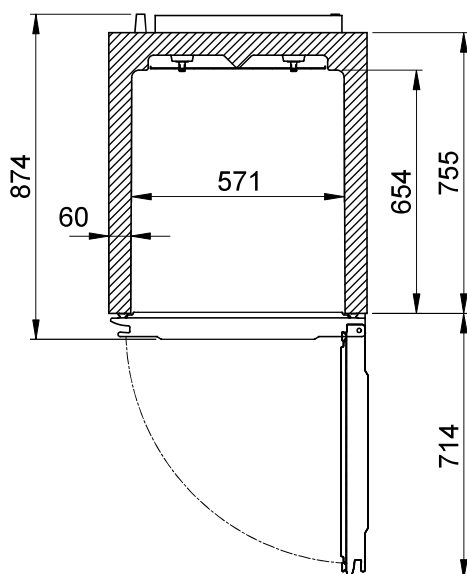

A	 L1 Low legs	 L2 Medium legs	 C2 Castors
---	---	---	--