G+ BY GRAM PROFESSIONAL

MADE IN DENMARK

GASTRO COUNTER C4 & F4

The Gastro counter is designed for intensive use, with frequent door openings and high demands on temperature stability. The chiller has an extended temperature range of -5 to +12 °C, whilst the freezer covers -25 to -5 °C. A heavy duty workhorse that will serve you for many years to come.

With GN 1/1 dimensions in each section, you can either place GN trays directly on the rails or stack several smaller containers on the sturdy wire shelves.

The counters are equipped with an intuitive and intelligent control system that ensures optimal operation and low energy consumption, whilst the practical handles and self-closing doors provide good ergonomics. The rounded corners and removable magnetic sealing strips make it easy to maintain optimal hygiene.

The units can be fitted with a range of optional extras, such as drawers, worktops, legs and castors etc.

Standard equipment:
- Stainless steel interior and exterior
- Sturdy worktop with fully foamed body
- 4 x 2 stainless steel wire shelves with anti-tilt
- Doors with self-closing function
- Removable heavy-duty door gasket
- Ajustable legs (135-200 mm) or castors (128mm)

Optional extras:
- 2 or 3 full length openable drawers per section (chiller only)
- Additional wire shelves and support rails
- Changed door direction L/R
- Locks on door or drawers
- Various castor and leg options
- Various worktop options including saladette
- Available for remote installation

	CHILLER -5/+12°C	FREEZER -25/-5°C
MODEL	C4	F4
ITEM NUMBER	940410120	940420220
VOLUME (liter, gross/net)	668 / 539	668 / 539
NUMBER OF SHELVES	8	8
ENERGY EFFICIENCY CLASS / EEI	A / 23,2	D / 56,0
ENERGY CONSUMPTION (kwh/year)	644	2587
SOUND LEVEL (db(A))	43,8	48,7
COOLING CAPACITY AT -10°C (W)	225	–
COOLING CAPACITY AT -25°C (W)	–	612
CLIMATE CLASS	5 (40°C/40% RH)	5 (40°C/40% RH)
DIMENSIONS W x D x H (m)	2163x700x885	2163x700x885
GROSS WEIGHT (kg)	189	189
REFRIGERANT / FILLING	R290 / 0,097 kg	R290 / 0,060 kg
GWP / Co2 EQUIVALENT	3 / 0,000291 t	3 / 0,000180 t
CONNECTION	230 V, 50 Hz / 2,06 A	230 V, 50 Hz / 3,01 A
CONNECTION LOAD (w)	218	437

GASTRO COUNTER C4 & F4

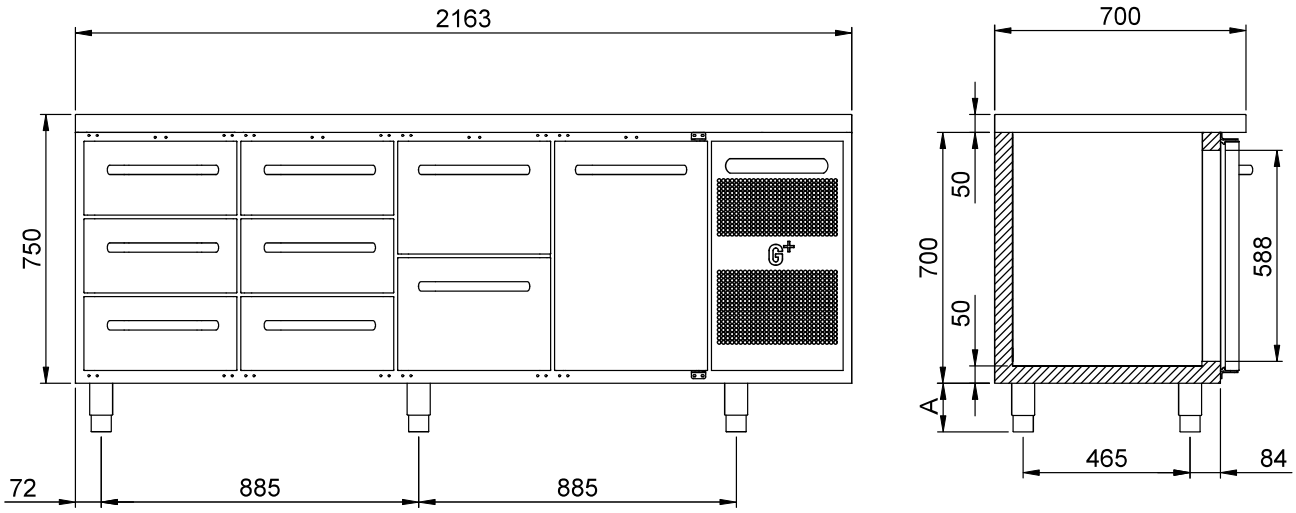

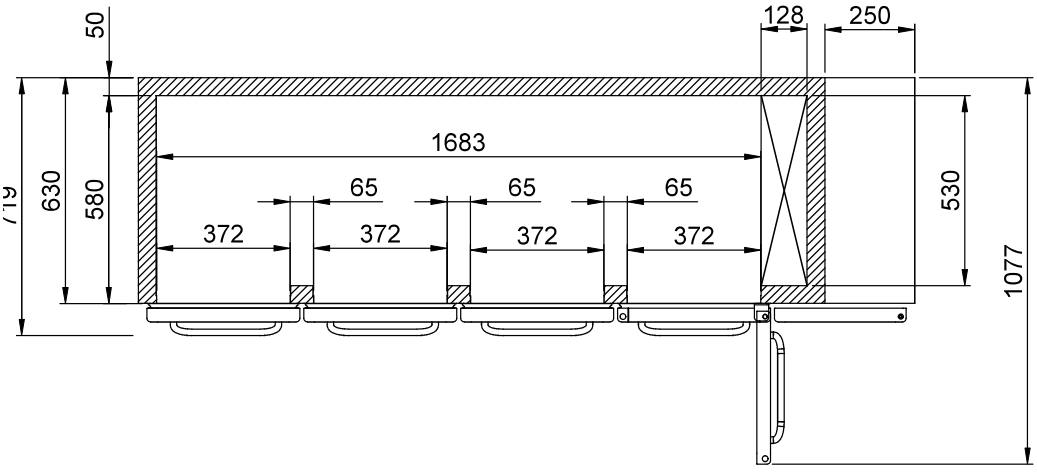

Various drawers options

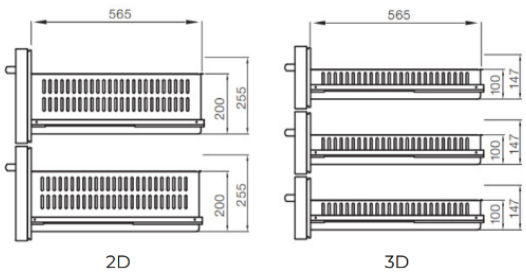

Various castor and leg options